

1.5:1 pilot ratio, load reactive, load control valve SERIES 2 / CAPACITY: 120 L/min. / CAVITY: T-2A



sunhydraulics.com/model/MBEB



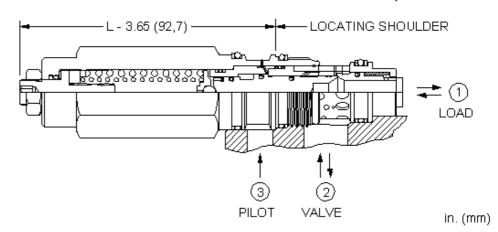

Load reactive, load control valves with pilot assist combine two valves; a check valve and a relief valve. The check valve allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting, pilot-assisted relief valve controls flow from port 1 to port 2. Pilot assist at port 3 lowers the effective setting of the relief valve at a rate determined by the pilot ratio.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Pilot Ratio	1.5:1
Maximum Recommended Load Pressure at Maximum Setting	260 bar
Maximum Setting	350 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Check Cracking Pressure	1,7 bar
Adjustment - No. of CCW Turns from Min. to Max. Setting	9
Reseat	>85% of setting
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Seal kit - Cartridge	Buna: 990202007
Seal kit - Cartridge	Polyurethane: 990002002
Seal kit - Cartridge	Viton: 990202006

CONFIGURATION OPTIONS

Model Code Example: MBEBLHN

CONTROL (L) FUNCTIONAL SETTING RANGE (H) SEAL MATERIAL (N

L Standard Screw Adjustment H 1000 - 4000 psi (70 - 280 bar), 3000 psi N Buna-N

C Tamper Resistant - Factory Set

(210 bar) Standard Setting
J 2000 - 5000 psi (140 - 350 bar), 3000
psi (210 bar) Standard Setting

V Viton

© 2019 Sun Hydraulics