



PORT

 $\odot$ 

in (mm)


sunhydraulics.com/model/DFC

Locating Shoulder

PORT 2

٥

Б

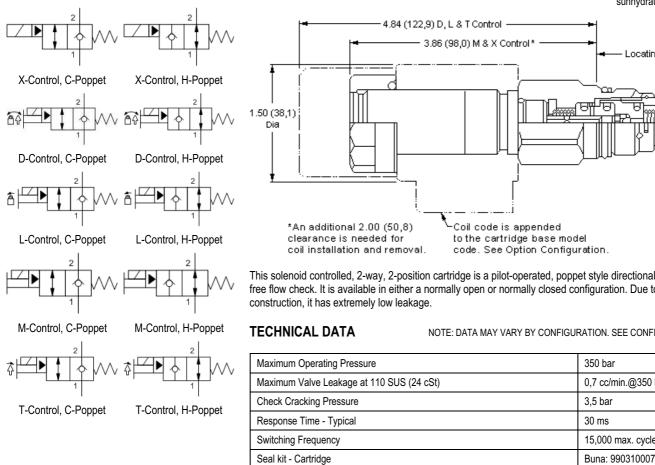

· Please verify cartridge clearance requirements when choosing a Sun manifold. Different valve controls and coils require different clearances. NOTES

• An additional 2.00 inches (50,8 mm) beyond the valve extension is needed for coil installation and removal.

Seal kit - Cartridge

## CONFIGURATION OPTIONS

## Model Code Example: DFCAXCN

| CONTROL                               | (X) POPPET CONF | IGURATION (C) | SE | AL MATERIAL | (N) | COIL *                       |
|---------------------------------------|-----------------|---------------|----|-------------|-----|------------------------------|
| X No Manual Override                  | C Normally Clo  | sed           | Ν  | Buna-N      |     | No coil                      |
| D Twist/Lock (Dual) Manual Override   | H Normally Op   | en            | Е  | EPDM        |     | 212 DIN 43650-Form A, 12 VDC |
| L Twist/Lock (Detent) Manual Override |                 |               | ۷  | Viton       |     | 224 DIN 43650-Form A, 24 VDC |
| Manual Override                       |                 |               |    |             |     | 912 Deutsch DT04-2P, 12 VDC  |
| T Twist (Momentary) Manual Override   |                 |               |    |             |     | 924 Deutsch DT04-2P, 24 VDC  |

\* Additional coil options are available

Viton: 990310006

