



sunhydraulics.com/model/MWE



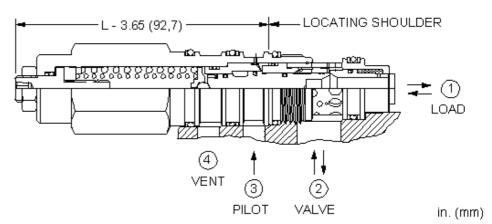

Vented, load reactive load control valves with pilot assist combine two valves; a check valve and a relief valve. The check valve allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting, pilotassisted relief valve controls flow from port 1 to port 2. Pilot assist at port 3 lowers the effective setting of the relief valve at a rate determined by the pilot ratio. Backpressure at port 2 does not affect the valve setting because the spring chamber references the vent (port 4).

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Pilot Ratio	3:1
Maximum Recommended Load Pressure at Maximum Setting	260 bar
Maximum Setting	350 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Check Cracking Pressure	1,7 bar
Adjustment - No. of CCW Turns from Min. to Max. Setting	9
Reseat	>85% of setting
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Seal kit - Cartridge	Buna: 990022007
Seal kit - Cartridge	Polyurethane: 990022002
Seal kit - Cartridge	Viton: 990022006

CONFIGURATION OPTIONS

Model Code Example: MWEALHN

CONTROL (L) FUNCTIONAL SETTING RANGE (H) SEAL MATERIAL (N) MATERIAL/COATING

L Standard Screw Adjustment

1000 - 4000 psi (70 - 280 bar), 3000 psi C Tamper Resistant - Factory Set (210 bar) Standard Setting

J 2000 - 5000 psi (140 - 350 bar), 3000 psi (210 bar) Standard Setting

N Buna-N Viton

/AP Stainless Steel, Passivated /LH Mild Steel, Zinc-Nickel

© 2019 Sun Hydraulics 1 of 1