
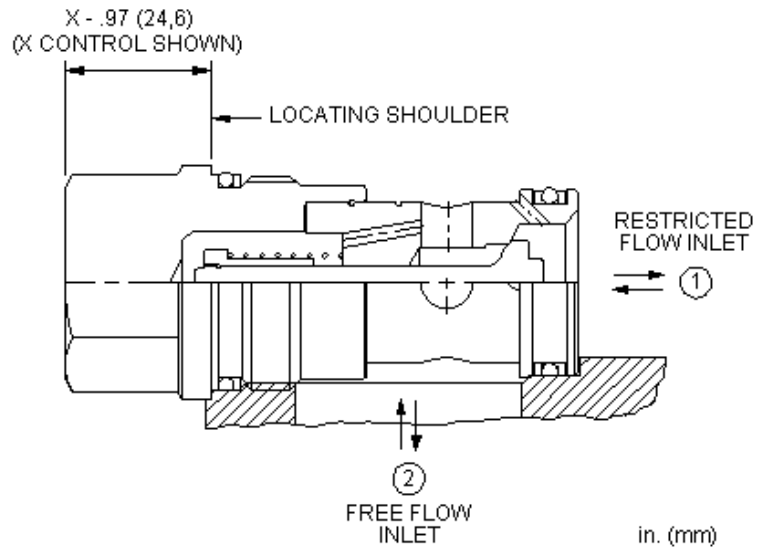




This valve is a fixed-orifice, non-pressure-compensated flow control with a reverse flow check. The flow setting is specified by the user and is set at the factory.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Orifice Range	0,4 - 5,5 mm
Seal kit - Cartridge	Buna: 990016007
Seal kit - Cartridge	Polyurethane: 990016002
Seal kit - Cartridge	Viton: 990016006

CONFIGURATION OPTIONS

Model Code Example: CNGCXCN

CONTROL	(X)	SETTING RANGE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING
X Not Adjustable		C 30 psi (2 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)		N Buna-N		Standard Material/Coating
		A 4 psi (0,3 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)		V Viton		/AP Stainless Steel, Passivated
		B 15 psi (1 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)				
		D 50 psi (3,5 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)				
		E 75 psi (5 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)				
		F 100 psi (7 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)				