
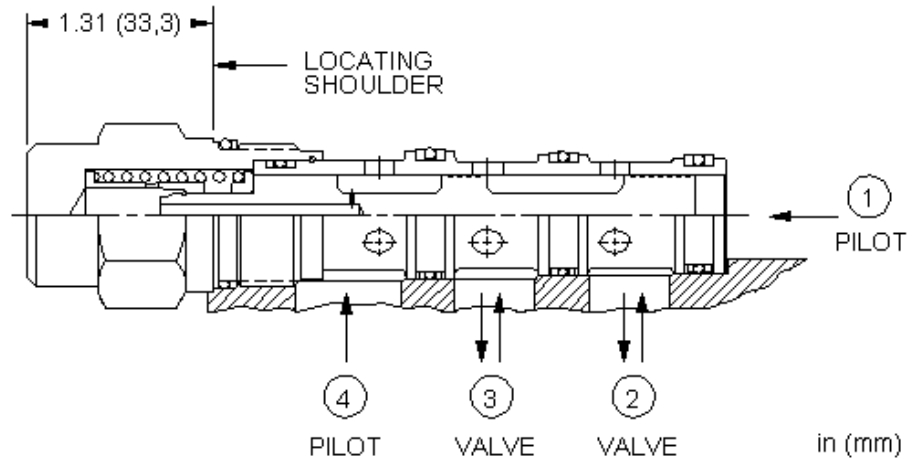


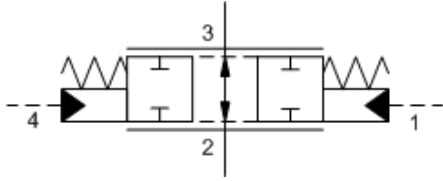

These bi-directional, normally open, modulating elements used with an external orifice, create a bi-directional, pressure compensated flow control.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Seal kit - Cartridge	Buna: 990032007
Seal kit - Cartridge	EPDM: 990032014
Seal kit - Cartridge	Polyurethane: 990032002
Seal kit - Cartridge	Viton: 990032006

CONFIGURATION OPTIONS

Model Code Example: LHFTXFN

CONTROL	(X)	NOMINAL CONTROL PRESSURE	(F)	SEAL MATERIAL	(N)
X Not Adjustable		F 100 psi (7 bar)		N Buna-N	
		D 50 psi (3,5 bar)		E EPDM	
		E 75 psi (5 bar)		V Viton	