
Hand pumps — PM 6-12-25-45 byB-e-s — Tech sheet

DETAILS

without release hand knob
with pressure relief valve
double acting hand pump for single acting cylinder
for fixing to tank

SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included

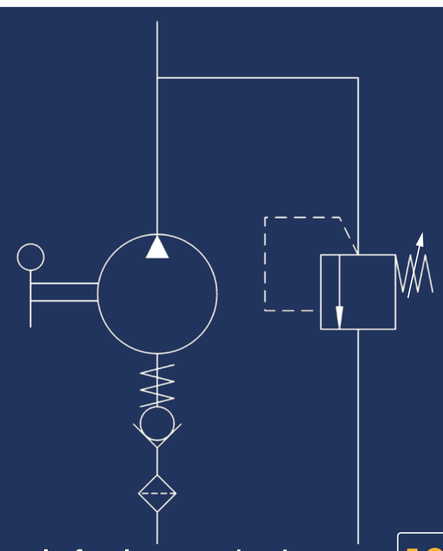


Pressure relief valve standard setting: **100 bar**


On Demand ATEX Certificates


II2G Ex h IIB TX Gb
II2D Ex h IIIB TX Db



EFFORT DIAGRAM

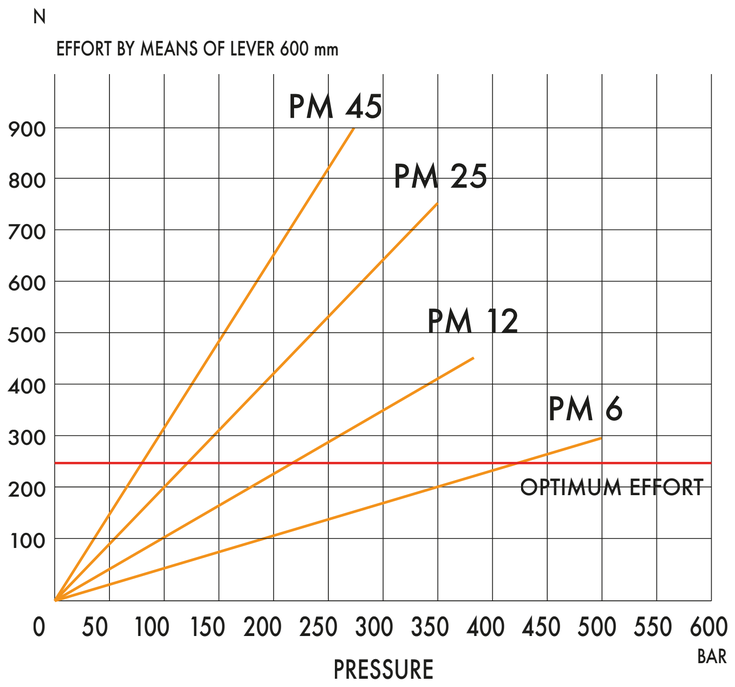

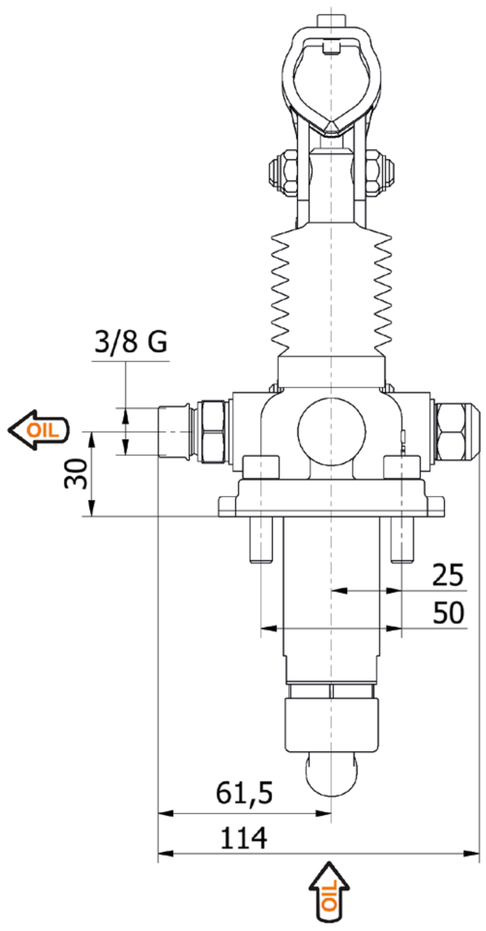

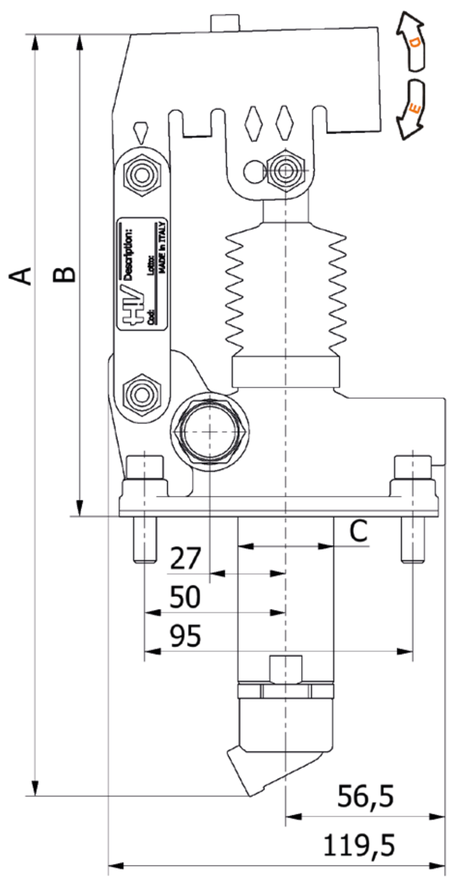

DISPLACEMENT cm³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm³	PRESSURE BAR OPTIMAL	PRESSURE BAR MAX	MASS KG	CODE
6	253	166	34	26	31	6,970	420	500	2,900	6049.0119
12	253	166	34	26	31	12,095	220	380	2,900	6050.0119
25	273	172	34	30	30	25,280	120	350	2,950	6051.0119
45	283	172	40	45	33	44,532	80	280	3,000	6052.0119

QUALITY SYSTEM CERTIFICATION DNV ISO 9001

HV Hydraulic s.r.l. | Take YOU to another WORLD

Head Office
Via dell'Agricoltura, 162 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Warehouse
Via del Lavoro, 111 e 135 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Tel. + 39 051 670.50.11 – Fax +39 051 670.53.74
P.IVA/C.F. 02390201206 – R.E.A. 435998 – Codice Univoco: 7HE8RN5
E-mail: info@hvhydraulic.com - Web: www.hvhydraulic.com