
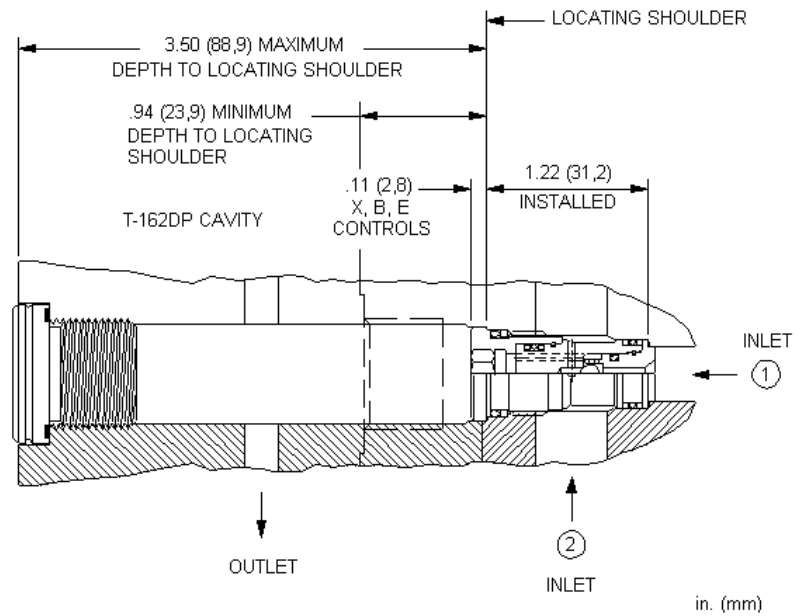




The single ball shuttle connects the higher of two work ports to the signal or common port. The signal is sensed externally out the back of the cartridge.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,3 cc/min.
Valve Internal Hex Size	8 mm
Seal kit - Cartridge	Buna: 990162007
Seal kit - Cartridge	Polyurethane: 990162002
Seal kit - Cartridge	Viton: 990162006

CONFIGURATION OPTIONS

Model Code Example: CSAMXXN

CONTROL	(X)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)
X Not Adjustable		X -		N Buna-N	
				V Viton	