
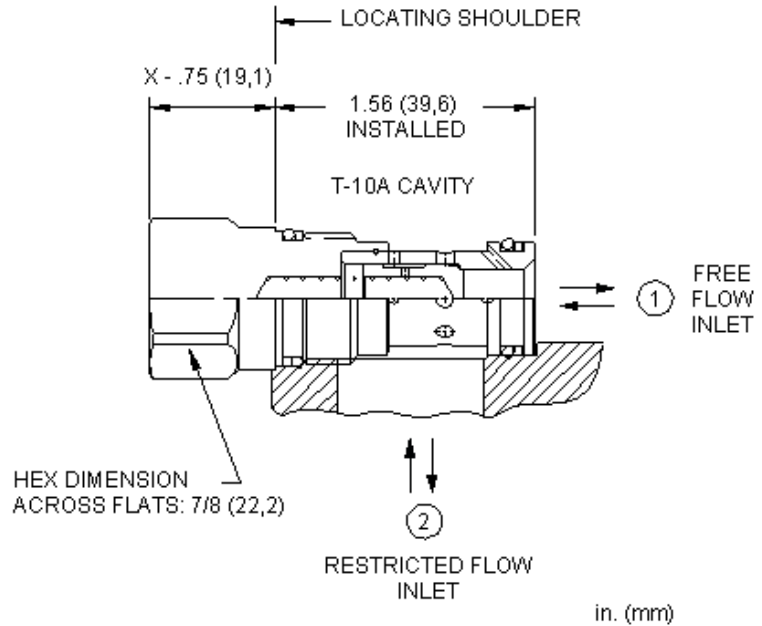




Free-flow, nose-to-side check valves with a bypass orifice allow free flow from port 1 to port 2. A customer specified orifice is included to restrict flow from port 2 to port 1. See technical data below for orifice range.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Orifice Range	0,4 - 1,6 mm
Seal kit - Cartridge	Buna: 990010007
Seal kit - Cartridge	Polyurethane: 990010002
Seal kit - Cartridge	Viton: 990010006

CONFIGURATION OPTIONS

Model Code Example: **CNDBXCN**

CONTROL	(X)	SETTING RANGE	(C)	SEAL MATERIAL	(N)
X Not Adjustable		C 30 psi (2 bar) Cracking Pressure, .016 - .062 in. (0,4 - 1,6 mm)		N Buna-N	
		V Viton			
		A 4 psi (0,3 bar) Cracking Pressure, .016 - .062 in. (0,4 - 1,6 mm)			
		B 15 psi (1 bar) Cracking Pressure, .016 - .062 in. (0,4 - 1,6 mm)			
		D 50 psi (3,5 bar) Cracking Pressure, .016 - .062 in. (0,4 - 1,6 mm)			
		E 75 psi (5 bar) Cracking Pressure, .016 - .062 in. (0,4 - 1,6 mm)			
		F 100 psi (7 bar) Cracking Pressure, .016 - .062 in. (0,4 - 1,6 mm)			