
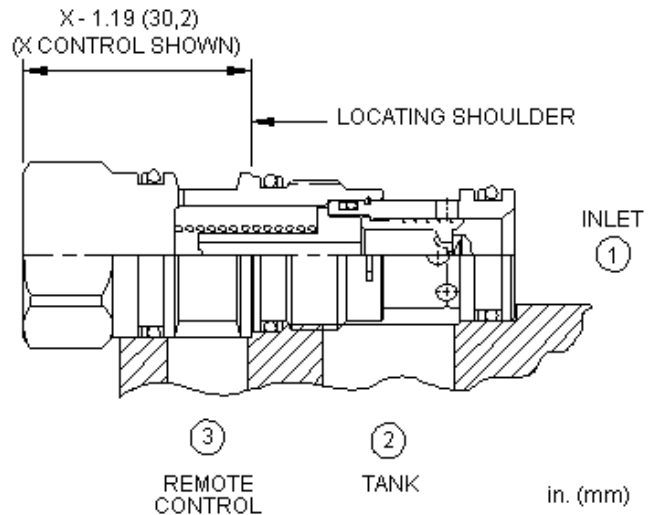




Normally closed modulating elements with an internal orifice between port 1 and port 3 can be used as a main-stage relief valve. The valve can be controlled remotely using a pilot relief or pilot solenoid valve.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Control Pilot Flow	0,16 - 0,25 L/min.
Maximum Valve Leakage at 110 SUS (24 cSt)	15 cc/min.@70 bar
Control Orifice Diameter	0,4 mm
Seal kit - Cartridge	Buna: 990011007
Seal kit - Cartridge	Polyurethane: 990011002
Seal kit - Cartridge	Viton: 990011006

CONFIGURATION OPTIONS

Model Code Example: LRDAXHN

CONTROL	(X) BIAS PRESSURE	(H) SEAL MATERIAL	(N) MATERIAL/COATING
X Not Adjustable	H 200 psi (14 bar) D 50 psi (3,5 bar) F 100 psi (7 bar)	N Buna-N V Viton	Standard Material/Coating /AP Stainless Steel, Passivated