
Hand pumps — PM 6-12-25-45 m-s — Tech sheet

DETAILS

with normally closed manipulator
double acting hand pump for single acting cylinder
for fixing to tank


SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included

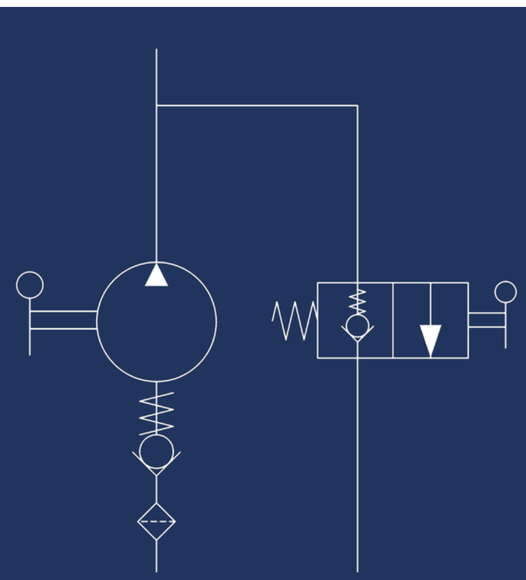



On Demand ATEX Certificates

II2G Ex h IIB TX Gb
II2D Ex h IIIB TX Db

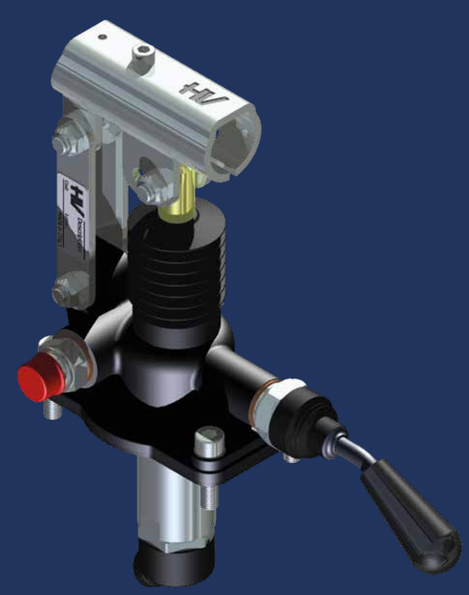

EFFORT DIAGRAM

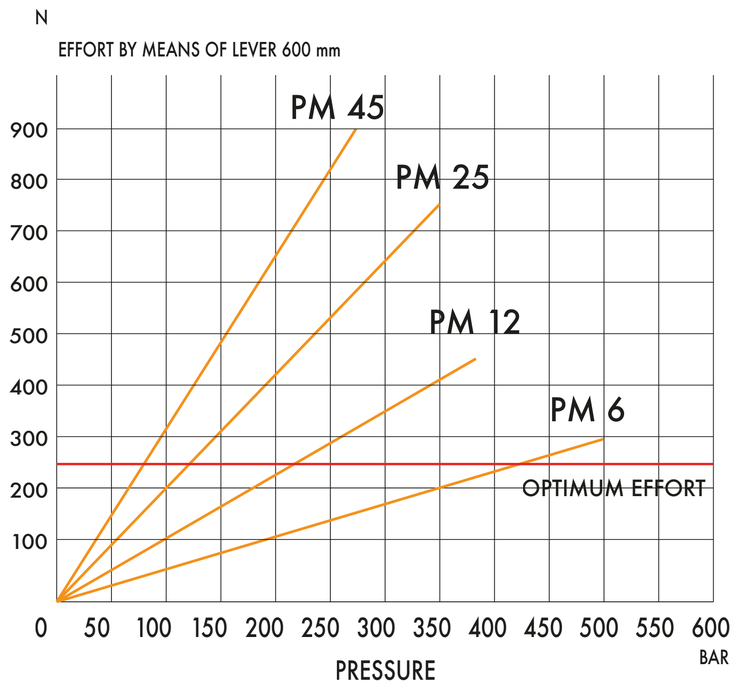

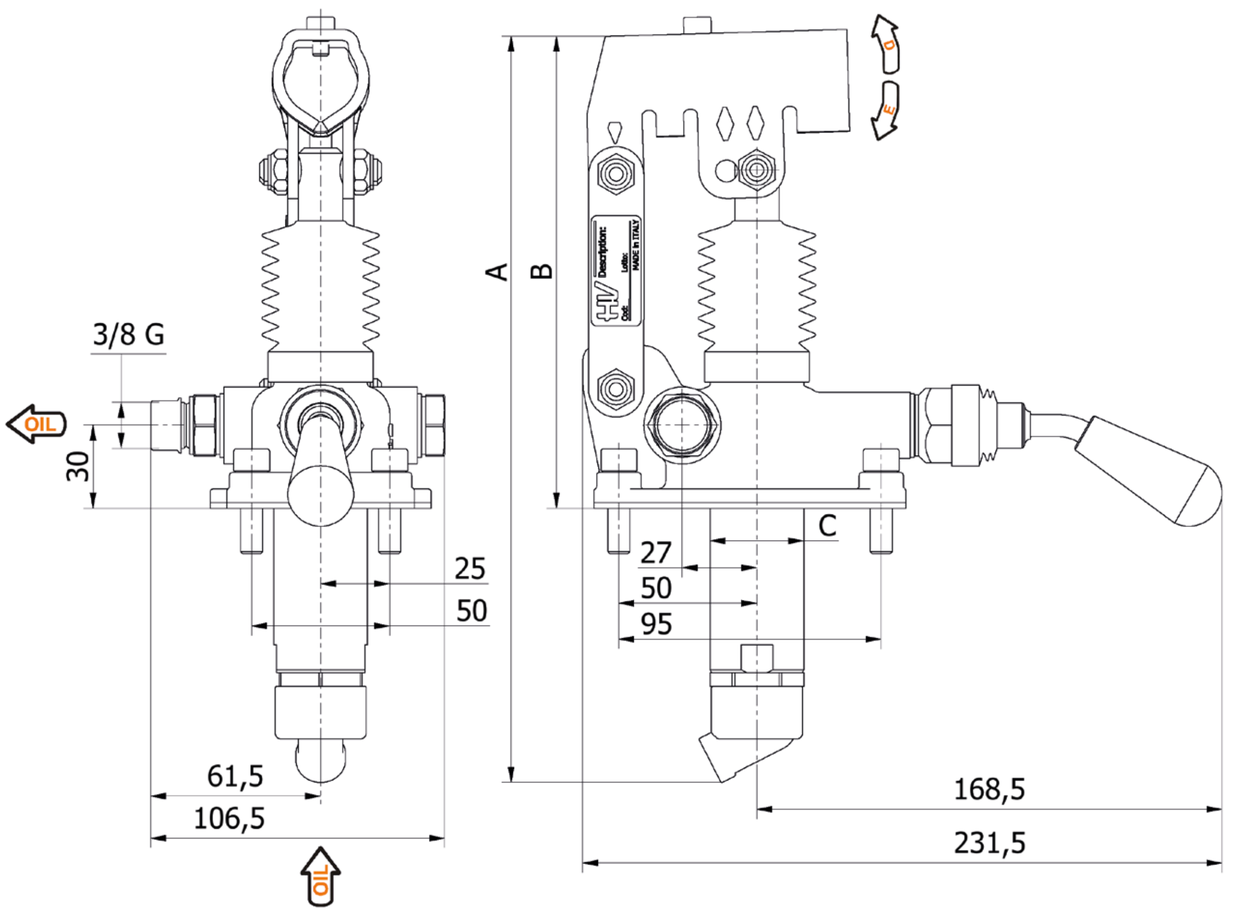

DISPLACEMENT cm³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
6	253	166	34	26	31	6,970	420	500	2,900	6049.0120
12	253	166	34	26	31	12,095	220	380	2,900	6050.0120
25	273	172	34	30	30	25,280	120	350	2,950	6051.0120
45	283	172	40	45	33	44,532	80	280	3,000	6052.0120

QUALITY SYSTEM CERTIFICATION DNV ISO 9001

HV Hydraulic s.r.l. | Take YOU to another WORLD

Head Office
Via dell'Agricoltura, 162 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Warehouse
Via del Lavoro, 111 e 135 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Tel. + 39 051 670.50.11 – Fax +39 051 670.53.74
P.IVA/C.F. 02390201206 – R.E.A. 435998 – Codice Univoco: 7HE8RN5
E-mail: info@hvhydraulic.com - Web: www.hvhydraulic.com