
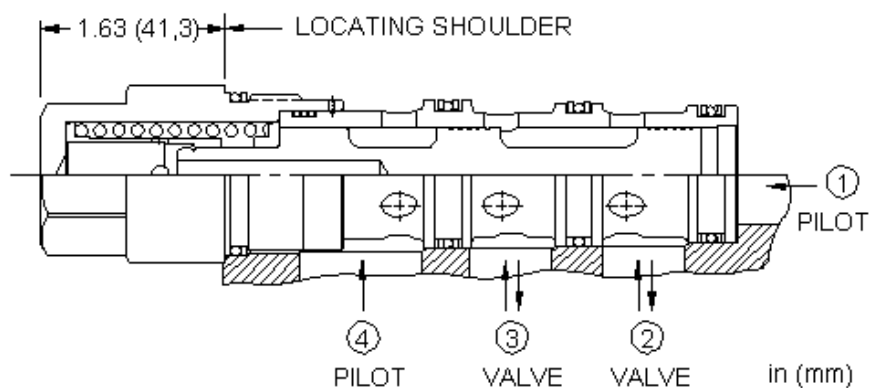


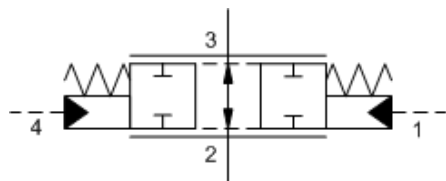

These bi-directional, normally open, modulating elements used with an external orifice, create a bi-directional, pressure compensated flow control.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Seal kit - Cartridge	Buna: 990033007
Seal kit - Cartridge	EPDM: 990033014
Seal kit - Cartridge	Polyurethane: 990033002
Seal kit - Cartridge	Viton: 990033006

CONFIGURATION OPTIONS

Model Code Example: LHHTXFN

CONTROL	(X)	DIFFERENTIAL PRESSURE	(F)	SEAL MATERIAL	(N)	MATERIAL/COATING
X Not Adjustable		F 100 psi (7 bar)		N Buna-N		Standard Material/Coating
		D 50 psi (3,5 bar)		E EPDM		/AP Stainless Steel, Passivated
		E 75 psi (5 bar)		V Viton		