
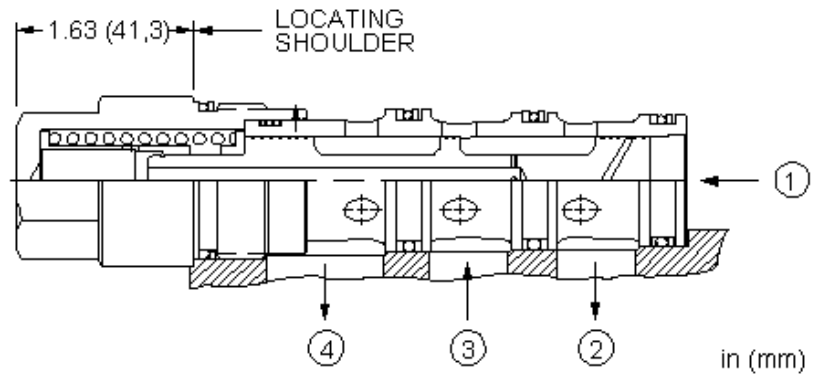


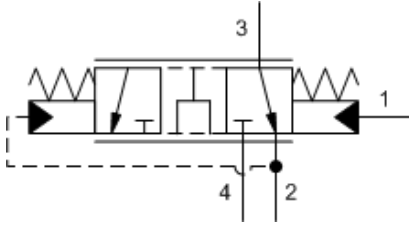

Bypass/restrictive modulating elements, when combined with an external orifice, create a bypass/restrictive flow control. Input flow (port 3) is directed to the priority or control flow at port 2. Once the priority requirements are met, excess flow is bypassed out port 4. The after-orifice signal is connected to port 1. The before-orifice design allows both pressure and flow to be controlled on the priority side of the circuit regardless of pressure in the bypass circuit. These valves work equally well in either closed or open center systems. Their main use is to allow after-market accessories to be driven off the host machine's hydraulic system without adding an additional pump.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Seal kit - Cartridge	Buna: 990033007
Seal kit - Cartridge	EPDM: 990033014
Seal kit - Cartridge	Polyurethane: 990033002
Seal kit - Cartridge	Viton: 990033006

CONFIGURATION OPTIONS

Model Code Example: LHHAXFN

CONTROL	(X)	DIFFERENTIAL PRESSURE	(F)	SEAL MATERIAL	(N)
X Not Adjustable		F 100 psi (7 bar)		N Buna-N	
		E 75 psi (5 bar)		E EPDM	
				V Viton	