
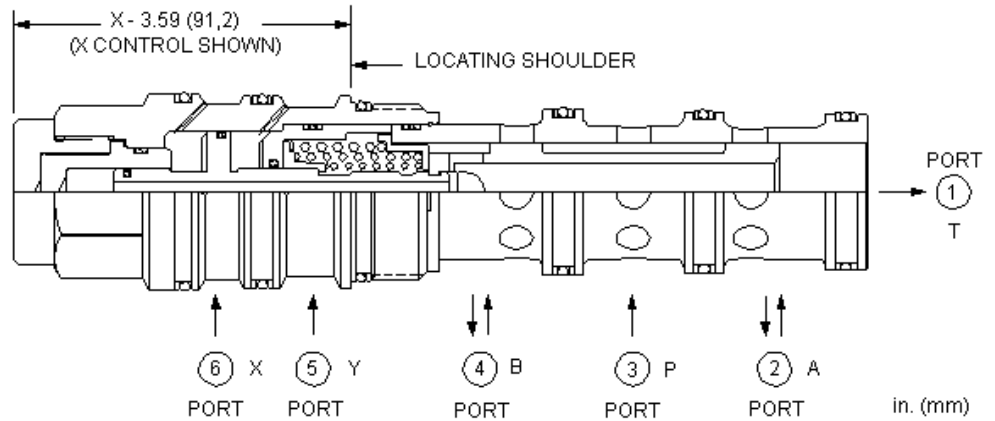


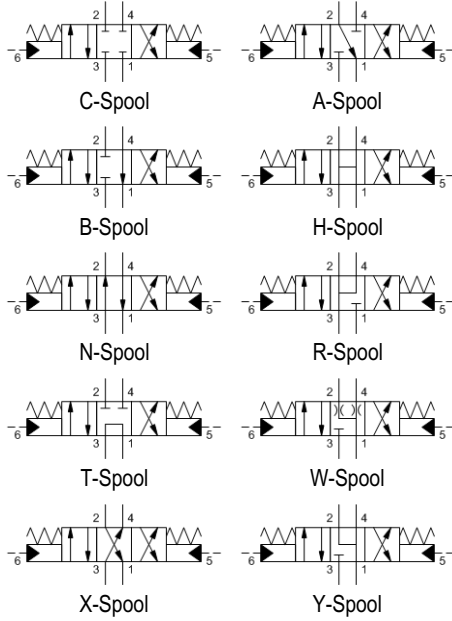

Three-position, 4-way directional cartridges are spring-centered, 6-port directional valves that can be configured from a choice of spool options. The supply port is port 3 and all ports will accept 5000 psi (350 bar). Capacity for these pilot-to-shift valves is dependent on the spool type specified.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Minimum Pilot Pressure Required to Shift Valve	9 bar
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	30 cc/min. @70 bar
Pilot Volume Displacement	6,9 cc
Seal kit - Cartridge	Buna: 990064007
Seal kit - Cartridge	EPDM: 990064014
Seal kit - Cartridge	Polyurethane: 990064002
Seal kit - Cartridge	Viton: 990064006

CONFIGURATION OPTIONS

Model Code Example: DCFCXCN

CONTROL	(X) SPOOL CONFIGURATION	(C) SEAL MATERIAL	(N) MATERIAL/COATING
X Standard Pilot	C Blocked Center A A to T Center B B to T Center H Open Center N P to A and B to T Center R Regen Center T Tandem Center W A and B Bleed to T Center Y A and B to T Center	N Buna-N E EPDM V Viton	Standard Material/Coating /AP Stainless Steel, Passivated